



Blinder Road 400 / 600
QUICKSTART GUIDE

**RECHARGE BEFORE
FIRST USE**

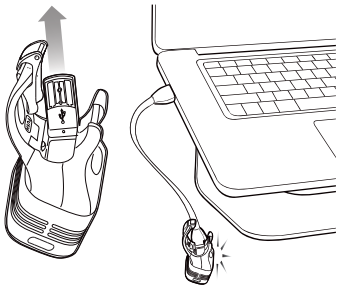

FITMENT CHECK

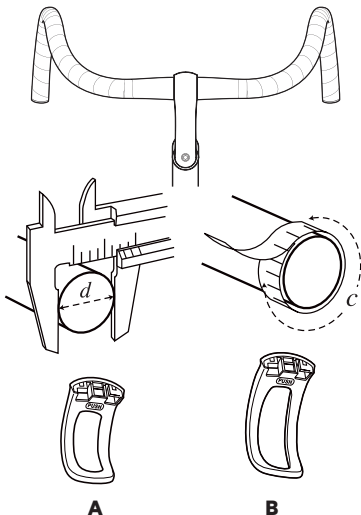


A

22 - 28 mm (d)
70 - 88 mm (c)

B

29 - 35 mm (d)
91 - 110 mm (c)

CABLE CLEARANCE

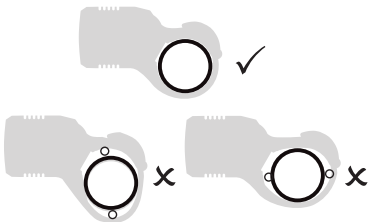

Keep clear of cables


Installez l'éclairage à l'écart des câbles

Mantenga la luz libre de cables


Non toccare i cavi

Nicht über den Kabelzügen befestigen

ケーブルは避けて下さい。



INTERFACE



ON/OFF (A) 1 Sec

MODE (A) 0.25 Sec

HI/LOW (B) 0.25 Sec



ENGLISH Please visit knog.com for more information and updates

FRANÇAIS Rendez-vous sur le site knog.com pour plus d'informations et pour les mises à jour.

ESPAÑOL Por favor, visite knog.com para más información y actualizaciones.

日本語 最新の情報は、Knogのホームページにてご確認ください。